



**Evaporator (dx) [GACV RX 040.1HF/3A-70.E-14NC.1H0M](#)**

<b>Capacity:</b>	12.20 kW <sup>(1)(2)</sup>	<b>Refrigerant:</b>	R449A <sup>(3)</sup>
<b>Surface reserve:</b>	0.00 %	<b>Evaporation temp. (mean):</b>	-6.00 °C
<b>Air flow:</b>	9,224.00 m <sup>3</sup> /h	<b>Superheating:</b>	5.00 K
<b>Air velocity:</b>	2.50 m/s	<b>Condensation temp. (mean):</b>	45.0 °C
<b>Air inlet:</b>	2.00 °C	<b>Subcooled temp.:</b>	40.80 °C
<b>Air outlet:</b>	-1.00 °C		
<b>Air pressure:</b>	1,013.00 mbar		
<b>Fans (AC):</b>	3 Piece(s) 1~230V 50Hz		
<b>Data per motor (nominal data):</b>		<b>Noise pressure level:</b>	56.00 dB(A) in 3.00 m <sup>(5)</sup>
<b>Speed:</b>	1310 min-1	<b>Noise power level:</b>	78.00 dB(A)
<b>Capacity(mech./el.):</b>	0.10 kW/0.19 kW	<b>Air throw:</b>	approx. 14 m <sup>(6)</sup>
<b>Current:</b>	0.85 A <sup>(4)</sup>	<b>Frost:</b>	0.00 mm
<b>ErP:</b>	Compliant <sup>(7)</sup>		
<b>Total el. power consumption:</b>	0.61 kW	<b>Energy efficiency class:</b>	C
<b>Casing:</b>	AlMg, Powder-coated RAL 9003	<b> Tubes:</b>	Stainl. Steel 1.4307 <sup>(8)</sup>
<b>Surface:</b>	60.90 m <sup>2</sup>	<b> Fins:</b>	Aluminum <sup>(8)</sup>
<b>Tube volume:</b>	18.6 l	<b> Distr.press.drop:</b>	0.90 bar
<b>Fin spacing:</b>	7.00 mm	<b> Outlet connection:</b>	26.9 * 2.60 mm
<b>Dry weight:</b>	126 kg <sup>(10)</sup>	<b> Inlet connection:</b>	26.9 * 2.60 mm
<b>Max. operating pressure:</b>	32.00 bar	<b> PED classification:</b>	Category I, module A <sup>(9)</sup>
<b>Distributions:</b>	13	<b> Passes:</b>	6
<b>Circuits:</b>	1N	<b> Connections in air direction:</b>	right side
<b>Dimensions: <sup>(10)</sup></b>			
<b>Length:</b>	2661 mm		
<b>Width:</b>	666 mm		
<b>Height:</b>	564 mm <sup>(10)</sup>		
<b>No. suspensions:</b>	8		

UI: 14NC.1H0


Product code: 253-14NC.1H0.OJH.\*\*\*-1R233.01.01.2100.0000.0000.0000.0121.30D18.41002.5121.614U.C13

Product type: MTO - 2023-08-08, PL 1/2023, GPC.EU Customer 2023.13-279a (64 Bit)

 Delivery time: 8 weeks (Status: 2023-08-25)<sup>(11)</sup>

Our General Terms of Sale and Delivery apply!

Subject to technical modifications

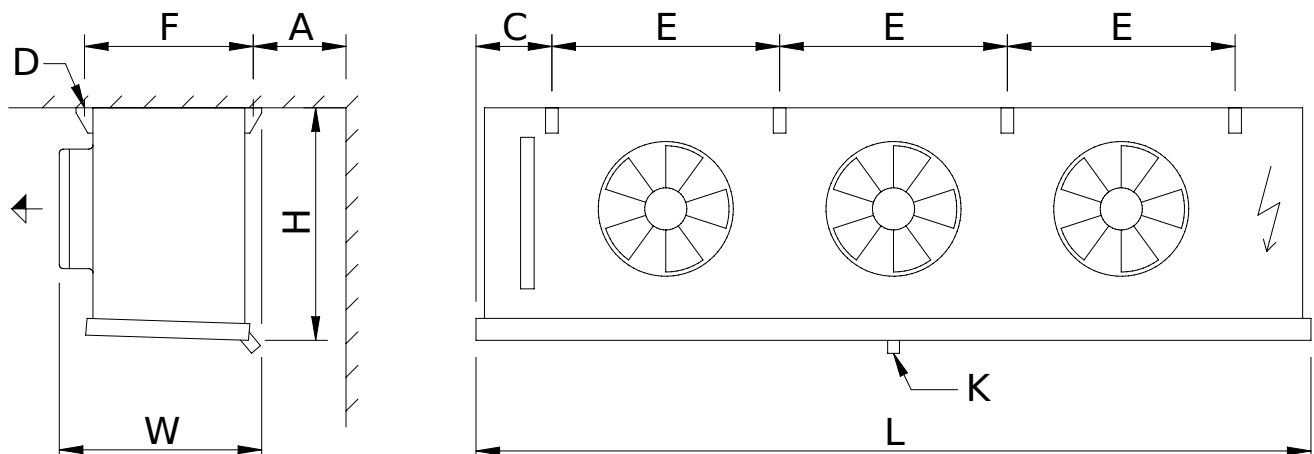

Drain according to DIN ISO 228-1 with G-thread (flat gasket).

Attention: Drawing and dimensions not valid for all accessory options!

L = 2661 mm W = 666 mm H = 564 mm E = 680 mm F = 573 mm C = 324 mm A = 400 mm D = 14 mm K = G1¼"

Accessories	Piece(s)
Mounting and wiring (Control cabinet, Fan)	1
Terminal box Fans wired seriell <sup>(12)</sup>	1
1 x (5209498) Terminal block for fan TB Fan 1ph+N 2.5 mini x1	
1 x (5209342) Terminal box (plastic) 130x94x81mm	
El. defrost coil light for t0≥-10°C 400V 3~N+PE - 5,25kW <sup>(13)</sup>	1
El. defrost tray standard for t0≥-40°C 230V 1~N+PE - 2,8kW <sup>(13)</sup>	1
Spiral strips (DSG092040) Pieces per distribution: 3	39

**Important remarks / explanatory notes:**

- (1) Calculations and capacity tests are based on the following standards: condensers/gas coolers EN 327, evaporators/air coolers EN 328, dry coolers EN 1048.
- (2) Capacity including Humidity Factor
- (3) Fluid group 2 according to pressure equipment directive 2014/68/EU
- (4) The current consumption can differ in dependence of the air temperature and of the variations of system voltage according to the VDE guidance.
- (5) According to the enveloping surface method defined in EN 13487/EN 9614-1; tolerance = +2 dB(A). Applies only for AC fans, AC fans with sine control and EC fans. Noise caused by other control methods, water spraying systems or sound reflexions occurring at the installation site are not taken into account and may result in an increased sound pressure level.
- (6) Distance at which an air velocity of 0.5 m/s can still be measured isothermally in an ideal space. The achievable penetration depth of the air flow in the cold room depends on the spatial geometry and other factors.
- (7) This unit is equipped with fans that meet the efficiency requirements of Directive 2009/125/EC (ErP Directive).
- (8) The unit may not be suitable for very corrosive atmospheres (close to shores, in smoke rooms, etc.). For further information, see material recommendations brochure or ask your sales partner.
- (9) Piping (DN = 54.5 mm, TSm<sub>ax</sub> = 100 °C, gaseous). Final classification according to pressure equipment directive 2014/68/EU during order processing.
- (10) Dimensions and weights are not valid for all possible options! They may differ for units with accessories or special units (S-...).
- (11) Delivery time for standard units ex works, i.e. without transport time. Times for units with customised drawing, special units, special accessories or larger quantities on request.
- (12) (GNSM03-VT0605-ID1734-MSNW-001) Width x Height x Depth: 130 mm x 94 mm x 81 mm, Protect. system IP 54, Operating temperature range: -35,0 °C - 60,0 °C
- (13) Fuse protection according to connected load on connection diagram, max. 25 A.